


Development and Utilization of Novel Quantum Beam Sources Using a High Energy Electron Beam

UVSOR Synchrotron Facility Division of Beam Physics and Diagnostics Research



TAIRA, Yoshitaka
Associate Professor
[yostaira@ims.ac.jp]

Education

2007 B.S. Nagoya University
2009 M.S. Nagoya University
2012 Ph.D. Nagoya University

Professional Employment

2011 JSPS Research Fellow
2012 Research Scientist, National Institute of Advanced Industrial Science and Technology (AIST)
2018 Senior Research Scientist, National Institute of Advanced Industrial Science and Technology (AIST)
2020 Associate Professor, Institute for Molecular Science
Associate Professor, The Graduate University for Advanced Studies

Awards

2011 Nagoya University Outstanding Graduate Student Award
2012 Oral Presentation Award, The 9th Annual Meeting of Particle Accelerator Society of Japan
2012 Young Researcher Best Poster Award, 12th International Symposium on Radiation Physics
2013 Young Scientist Award of the Physical Society of Japan
2015 Young Researcher Best Presentation Award, Beam Physics Workshop 2015
2021 Outstanding Presentation Award, 64th Annual Meeting of the Japanese Society of Radiation Chemistry
2023 Young Scientist Award of the Japanese Positron Science Society

Member

Post-Doctoral Fellow
SALEHI, Elham

Graduate Student
WAKITA, Yukiya*
YANG, Yuxuan†
ZHOU, Weixin†

Secretary
ISHIHARA, Mayumi
KAMO, Kyoko
YOKOTA, Mitsuyo

Keywords

Electron Beams, Synchrotron Radiation, Gamma-Rays

Our group develop new electromagnetic wave sources using a high energy electron beam. In the UVSOR-III electron storage ring at the Institute for Molecular Science, a 750-MeV electron beam can be generated. Electromagnetic waves in a wide frequency range from ultraviolet waves to gamma-rays are emitted by interacting the electron beam with magnetic fields and lasers.

Inverse Thomson (Compton) scattering is a method to generate a high energy gamma-ray by the interaction between a high energy electron and a laser. We have developed ultra-short pulsed gamma-rays with the pulse width of sub-ps to ps range by using 90-degree inverse Thomson scattering (Figure 1). This ultra-short pulsed gamma-rays were applied to gamma-ray-induced positron annihilation spectroscopy (GiPAS). A posi-

tron is an excellent probe of atomic scale defects in solids and of free volumes in polymers at the sub-nm to nm scale. GiPAS enables defect analysis of a thick material in a few cm because positrons are generated throughout a bulk material via pair production.

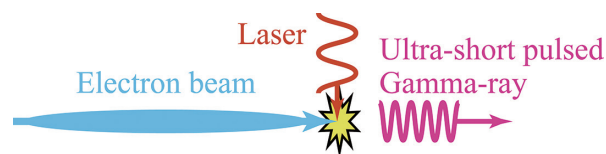


Figure 1. Schematic illustration of 90-degree inverse Thomson scattering.

Selected Publications

- Y. Taira, M. Adachi, H. Zen, T. Tanikawa, N. Yamamoto, M. Hosaka, Y. Takashima, K. Soda and M. Katoh, "Generation of Energy-Tunable and Ultra-Short-Pulse Gamma Ray via Inverse Compton Scattering in an Electron Storage Ring," *Nucl. Instrum. Methods Phys. Res., Sect. A* **652**, 696 (2011).
- Y. Taira, T. Hayakawa and M. Katoh, "Gamma-Ray Vortices from Nonlinear Inverse Thomson Scattering of Circularly Polarized Light," *Sci. Rep.* **7**, 5018 (2017).
- Y. Taira, M. Fujimoto, S. Ri, M. Hosaka and M. Katoh, "Measurement of the Phase Structure of Elliptically Polarized Undulator Radiation," *New J. Phys.* **22**, 093061 (2020).
- Y. Taira, R. Yamamoto, K. Sugita, Y. Okano, T. Hirade, S. Namizaki, T. Ogawa and Y. Adachi, "Development of Gamma-Ray-Induced Positron Age-Momentum Correlation Measurement," *Rev. Sci. Instrum.* **93**, 113304 (2022).
- Y. Taira *et al.*, "Measurement of the Spatial Polarization Distribution of Circularly Polarized Gamma Rays Produced by Inverse Compton Scattering," *Phys. Rev. A* **107**, 063503 (2023).

1. Gamma Ray-Induced Positron Annihilation Spectroscopy (GiPAS)

In GiPAS, defect analysis is performed by measuring the energy spectrum and emission time distribution (positron lifetime spectrum) of annihilation gamma rays, which are generated when a positron annihilates with an electron inside material. Gamma-ray-induced positron annihilation lifetime spectroscopy (GiPALS) is a technique that measures the time difference distribution between a reference signal and a detector output of annihilation gamma rays. The reference signal is the output of a photodiode placed near the collision point between the electron beam and the laser, which detects the laser just before it generates gamma rays. A BaF₂ scintillator and a photomultiplier tube is utilized to detect the annihilation gamma rays. Two detectors are arranged at 180 degrees because two annihilation gamma rays are generated at 180-degree direction.

A digital oscilloscope is used to store the waveforms of the photodiode and the BaF₂ detector, and calculate the time difference distribution. One digital oscilloscope for four BaF₂ detectors is used as a pair of detection systems. The annihilation gamma rays are generated to whole solid angle. Therefore, array detectors are effective to increase the count rate of the annihilation gamma rays and to reduce the measurement time. A detection system with eight detectors and two digital oscilloscopes was constructed (Figure 2). Time resolution is 140 ps in full width at half maximum, which is high despite the use of a 52-mm thick BaF₂ scintillator. The count rate is 20 cps.

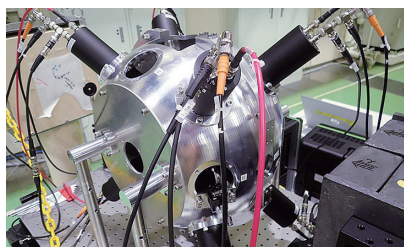


Figure 2. Gamma-ray-induced positron annihilation lifetime spectroscopy system using eight detectors and two digital oscilloscope.

Currently, user applications of GiPALS are underway at BL1U of UVSOR, and users from universities, research institutes, and private companies are using the system. Measurements of samples under special environments such as stress loading, high temperature, gas atmosphere, laser irradiation, hydrogenation, etc., which are difficult to measure with conventional methods, are being performed.

Meanwhile, we are also developing gamma-ray-induced spin-polarized positron annihilation spectroscopy using circularly polarized gamma rays. If the electron spins of a sample are ordered in a particular direction and the positrons are also spin-polarized, the Doppler broadening spectra of annihilation gamma rays and the positron lifetime will change. The spin-polarized

positrons are generated from the circularly polarized gamma rays inside a sample. From this change, it is possible to obtain information about the electron spins around defects in magnetic materials. To demonstrate the principle of circularly polarized gamma-ray-induced spin-polarized positron annihilation spectroscopy, a pure iron sample is mounted between permanent magnets and the positron lifetime and Doppler broadening are measured. We have not been able to measure the difference in positron lifetime due to the helicity inversion of circularly polarized gamma rays, but we will continue our research and development.

2. Measurement of Gamma-Rays Generated by Using Polarized Lasers

Inverse Compton scattering of a polarized laser by energetic electrons is an excellent method to generate polarized gamma rays. The development and use of linearly and circularly polarized gamma rays have been conducted. The polarization state of linearly and circularly polarized lasers is homogeneous across their cross sections. However, it is possible to produce lasers with spatially variant polarization states. An example is the axially symmetric polarization state, referred to as an axially symmetric polarized laser or a cylindrical vector beam. Although the polarization characteristics of gamma rays produced by linearly or circularly polarized lasers have been theoretically clarified, that of gamma rays generated by axially symmetric polarized lasers have not. If gamma rays with novel polarization characteristics can be generated, it is possible to develop new ways to use gamma rays.

The spatial distribution of the gamma rays, which reflects the polarization characteristics, was measured with a two-dimensional CdTe imaging sensor. Gamma rays were generated through 90-degree collisional inverse Compton scattering between an electron beam and an axially symmetric polarized laser. The results showed that the spatial distribution of gamma rays generated from axially symmetric polarized lasers was changed compared to that of linearly or circularly polarized gamma rays. Comparing the linearly polarized gamma rays with those generated by the axially symmetric polarized laser, a node that appears at an outer scattering angle along the polarization axis of the linearly polarized gamma ray was absent in the gamma ray generated by the axially symmetric polarized laser. Compared to the circularly polarized gamma rays, the gamma rays generated by the axially symmetric polarized laser showed a spatial distribution that was slightly expanded in a specific direction rather than concentric, while the circularly polarized gamma rays showed a concentric spatial distribution. This was thought to be due to the relatively intense polarization component of the axially symmetric polarized laser. These results suggested that axially symmetric polarized lasers generate gamma rays with different polarization states. In the near future, a polarimeter of gamma rays will be constructed to investigate the spatial polarization distribution of gamma rays.

Award

TAIRA, Yoshitaka; Young Scientist Award of the Japanese Positron Science Society (2023).

* carrying out graduate research on Cooperative Education Program of IMS with Nagoya University

† CSC-IMS Scholarship Program